

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

## Sixth Semester B.E. Degree Examination, Jan./Feb. 2021

### Heat Transfer

Time: 3 hrs.

Max. Marks: 80

*Note: 1. Answer any FIVE full questions, choosing ONE full question from each module.*

*2. Use of heat transfer data handbook is permitted*

#### Module-1

- 1 a. Define the following terms: i) Convective heat transfer coefficient    ii) Thermal diffusivity  
 iii) Black body    iv) Emissivity    (04 Marks)
- b. Consider a one dimensional steady state heat conduction in a plate with constant thermal conductivity in a region  $0 \leq x \leq 1$ . A plate is exposed to uniform heat flux 'q' W/M<sup>2</sup> at  $x = 0$  and dissipates heat by convection at  $x = L$  with heat transfer coefficient 'h' in the surrounding air at  $T_{\infty}$ . Write the mathematical formulation of this problem for the determination of one dimensional steady state temperature.    (04 Marks)
- c. The walls of a house in cold region consists of three layers, an outer brick wall, 15cm thick, an inner wooden panel, 1.2cm thick, the intermediate layer is made of an insulating material, 7cm thick. The thermal conductivities of brick and wood used are 0.7W/mK and 0.18W/mK. The inside and outside temperature of composite wall are 21°C and -15°C. If the layer of insulation offers twice the thermal resistance of the brick wall. Calculate:
  - i) Rate of heat loss per unit area of wall    ii) Thermal conductivity of insulating material.    (08 Marks)

OR

- 2 a. Derive three dimensional heat conduction equation in cylindrical coordinate system for a isotropic material.    (08 Marks)
- b. A plane wall 4cm thick has one of its surfaces in contact with a fluid at 130°C with a surface heat transfer coefficient of 250W/m<sup>2</sup>K and the other surface is in contact with another fluid at 30°C with a surface heat transfer coefficient of 500W/m<sup>2</sup>K. The thermal conductivity of wall varies with temperature is given by  $K = 20 (1 + 0.001T)$ , where T is the temperature. Determine the rate of heat transfer through the wall and surface temperatures of the wall.    (08 Marks)

#### Module-2

- 3 a. Obtain an expression for temperature distribution through a rectangular fin when the end of fin is insulated.    (08 Marks)
- b. An electrical cable of 12mm diameter is insulated to increase the current carrying capacity by 15% without increasing the cable surface temperature above 70°C. The ambient air temperature is 30°C. Calculate the conductivity of insulating material required assuming that the heat transfer coefficient on bare and insulated wire is same as 14W/m<sup>2</sup>K.    (08 Marks)


OR

- 4 a. Show that the temperature distribution in a body during Newtonian heating or cooling is given by  $\frac{T - T_{\infty}}{T_1 - T_{\infty}} = e^{-BiFo}$     (08 Marks)
- b. A steel cylinder 0.2m diameter and 3m long initially at 500°C is suddenly immersed in a fluid at 40°C. The convective coefficient between the cylinder surface and fluid is 200W/m<sup>2</sup>K. Assume  $K = 40W/mK$ ,  $\alpha = 1 \times 10^{-5}m^2/sec$ . Calculate after 20 minutes
  - i) Temperature at a radius of 0.05m    ii) Heat transferred during 20 mins.    (08 Marks)

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.  
 2. Any revealing of identification, appeal to evaluator and /or equations written eg, 42+8 = 50, will be treated as malpractice.

**Module-3**

- 5 a. Explain Implicit and Explicit method for discretization of 1-dimensional transient heat conduction problem. (08 Marks)
- b. A steady state, finite difference analysis has been performed on a cylindrical fin with a diameter of 12mm and a thermal conductivity of 15W/mK. The convection process is characterized by a fluid temperature of 25°C and a heat transfer coefficient of 25W/m<sup>2</sup>K.

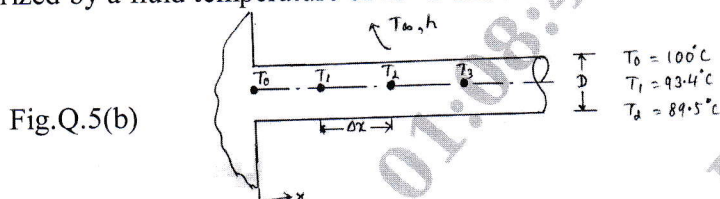

- i) The temperatures for the first three nodes, separated by a spatial increment of  $x = 10\text{mm}$ . Determine the fin heat rate.
- ii) Determine the temperature at node 3,  $T_3$ . (08 Marks)

**OR**

- 6 a. State: i) Kirchoff's law ii) Stefan Boltzman law iii) Wein's displacement law. (06 Marks)
- b. Calculate the net radiant heat exchange per m<sup>2</sup> area for two large parallel plates at temperature of 427°C and 27°C respectively.  $\epsilon$  for hot plates is 0.9 and for cold plate is 0.6. If polished aluminium shield is placed between them. Find the percentage reduction in heat transfer  $\epsilon$  (shield) = 0.4. (10 Marks)

**Module-4**

- 7 a. Explain the following:  
 i) Velocity boundary layer  
 ii) Thermal boundary layer. (06 Marks)
- b. Air at 15°C and 1 atmospheric flows over a cylinder of 400mm diameter and 1500mm height at a velocity of 30km/hr with surface temperature of 45°C. Estimate the rate of heat transfer from the cylinder. (10 Marks)

**OR**

- 8 a. Obtain fundamental relationship between Nusselt, Prandtl and Grashof numbers applied to natural convection using Buckingham  $\pi$ -theorem. (08 Marks)
- b. A 350mm long glass plate is hung vertically in the air at 24°C, while its temperature is maintained at 80°C. Calculate the boundary layer thickness at the trailing edge of plate. Also calculate the average heat transfer coefficient over the entire length of plate. (08 Marks)

**Module-5**

- 9 a. Derive an expression for LMTD of parallel flow heat exchanger. (08 Marks)
- b. In a double pipe counter flow heat exchanger, 10,000kg/hr of an oil having specific heat of 2095J/kgK is cooled from 80°C to 50°C by 8000 kg/hr of water entering at 25°C. Determine the heat exchanger area for an overall heat transfer coefficient of 300W/m<sup>2</sup>K. Take specific heat of water as 4180J/kgK. (08 Marks)

**OR**

- 10 a. Distinguish between the nucleate boiling and film boiling. (06 Marks)
- b. A tube of 2m length and 25mm outer diameter is to be condense saturated steam at 100°C. While the tube surface is maintained at 92°C. Estimate the average heat transfer coefficient and the rate of condensation of steam if the tube is kept at horizontal. The steam condenses on outside of the tube. (10 Marks)

\* \* \* \* \*

--	--	--	--	--	--	--

## Sixth Semester B.E. Degree Examination, Jan./Feb.2021

### Design of Machine Elements – II

Time: 3 hrs.

Max. Marks: 80

- Note:** 1. Answer any FIVE full questions, choosing ONE full question from each module.  
 2. Assume missing data suitably.  
 3. Design DHB is permitted to refer.

#### Module-1

- 1 a. Determine the dimensions of I-section, as shown in Fig. Q1 (a) in which maximum fiber stresses are numerically equal in pure bending. Given  $b_1 + b_0 = 120$  mm (12 Marks)

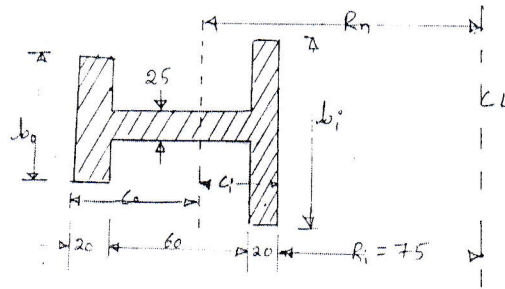


Fig. Q1 (a)

- b. A thin cylinder of diameter 600 mm and 10 mm wall thickness is subjected to internal pressure of 1.5 MPa. Find the stresses induced in the wall. (04 Marks)

#### OR

2. a. A 100 mm inside and 150 mm outside sleeve is press fitted on to a shaft of 100 mm diameter, take  $E = 210$  GPa, Poissons ratio of 0.28. The contact pressure is not to exceed 60 MPa. Determine  
 (i) The tangential stresses at the inner and outer surface of the sleeve and outside diameter of the shaft.  
 (ii) The radial stresses in the sleeve and shaft.  
 (iii) The original diameters of the shaft and hub before press fit. (12 Marks)
- b. Discuss the differences between straight and curved beam. (04 Marks)

#### Module-2

- 3 a. A leathers belt  $9\text{mm} \times 250\text{mm}$  is used to drive a cast iron pulley 90 cm in diameter at 336 rpm. If the active arc of contact on the smaller pulley is  $120^\circ$  and the stress in the tight side is 2 MPa, find the power capacity of the belt which weighs  $0.00098 \text{ kg/cm}^3$ ,  $m = 0.35$  of leather. (12 Marks)
- b. Discuss types of power transmission chains. (04 Marks)

#### OR

- 4 The inlet valve of an IC engine operated by a spring exerts a force of 250 N when the valve is closed and 450 N when the valve is open. The lift is 8 mm. The material test gives the following results.  $\tau_y = 600$  MPa, Endurance stress in torsion  $\tau_{-1} = 450$  MPa,  $G = 80$  GPa,

$$C = \frac{D}{d} = 6, \text{ F.S} = 1.5$$

(16 Marks)

**Module-3**

- 5 Design a pair of spur gears to transmit 24 kW at 1000 rpm to a parallel shaft to be rotated at 400 rpm. The center distance between the shaft is 175 mm. Assume  $\alpha = 20^\circ$  FDI. Select cast steel for both gears ( $\sigma_p = \sigma_g = 138$  MPa). (16 Marks)

OR

- 6 a. Define formative number of teeth for Bevel gears. (02 Marks)  
 b. A pair of Bevel gears transmitting 7.5 kW at 300 rpm of pinion. The pressure angle is  $20^\circ$ . The pitch diameters of pinion and gear at their large ends are 150 mm and 200 mm respectively. The face width of the gear is 40 mm. Determine the components of the resultant gear tooth forces acting on the pinion and the gear. (14 Marks)

**Module-4**

- 7 Design a worm gear drive to transmit 12 kW at 1200 rpm. The speed reduction designed is 30 : 1. The worm is made of hardened steel of  $\sigma_0 = 210$  MPa and gear of phosphor bronze of  $\sigma_0 = 90$  MPa. The teeth are  $14 \frac{1}{2}$ . Check the heat capacity of the gear. (16 Marks)

OR

- 8 a. Discuss the types of clutches and their applications. (06 Marks)  
 b. A simple Band brake of drum, diameter 600 mm has a band passing over it with an angle of contact  $225^\circ$ . While one end is connected to the fulcrum, the other end is connected to the Brake lever at a distance of 400 mm from the fulcrum. The brake lever is 1 m long. The brake is to absorb a power of 15 kW at 720 rpm. Design the brake lever of rectangular cross section, assuming depth to be thrice the width. Take  $\sigma_b = 80$  MPa. (10 Marks)




Fig. Q8 (b)

**Module-5**

- 9 a. A Journal bearing 75 mm long supports a load of 7.3 kN on a 50 mm diameter journal turning at 750 rev/min. The diametral clearance is 0.07 mm, what should be the viscosity of the oil if the operating temperature of the bearing surface is to be limited to  $75^\circ\text{C}$  when still air is at  $20^\circ\text{C}$ . (12 Marks)  
 b. Explain types of roller contact bearings. (04 Marks)

OR

- 10 Select a suitable ball-bearing required to be mounted on a shaft of diameter 45 mm to withstand a radial load of 6 kN and a load of 3 kN at a rated speed of 300 rpm. The bearing works for 50 hours/week for 3 years. Assume light shocks. (16 Marks)

\*\*\*\*\*